Midea | HICONICS

Operating temperature range[℃]						
Max. operation altitude[m]						
Storage temperature[℃]						
Typical noise emission[dBA]						
Self-consumption at night [W]						
Warranty[Years]						
[mm]						
Weight[KG]						

Nominal Battery Pack Energy[KWh]				
Available Battery Pack Energy[KWh]				
Nominal Battery Cell Capacity[Ah]				
Nominal Voltage[V]				
Nominal Charging Current[A]				
Nominal Discharging Current[A]				
Warranty[Years]				
Dimension[mm]				
Weight[Kg]				

Nominal Battery Pack Energy[KWh]						
Available Battery Pack Energy[KWh]						
Nominal Battery Cell Capacity[Ah]						
Nominal Voltage[V]						
Nominal Charging Current[A]						
Nominal Discharging Current[A]						
Warranty[Years]						
Dimension[mm]						
Weight[Kg]						

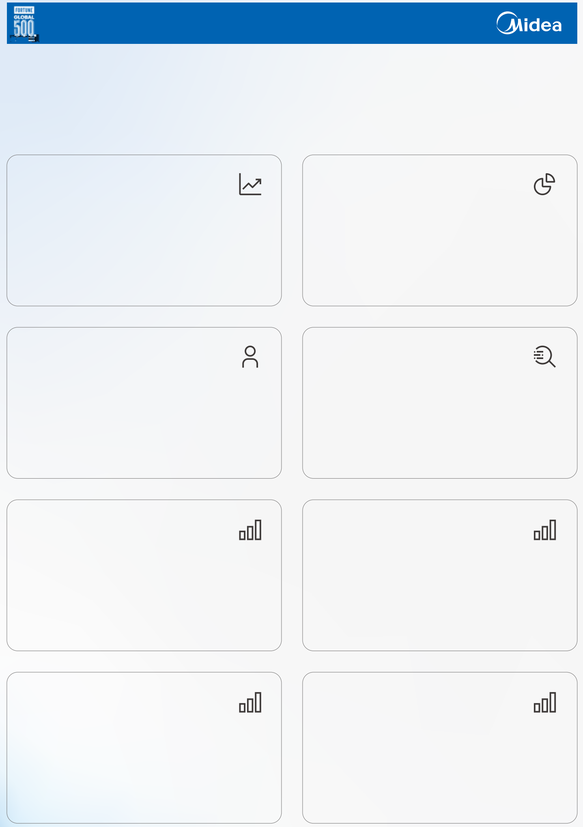

ODM VALUE CHAIN
A REPEATABLE PATH FOR EXCELLENCE IN QUALITY DELIVERY

Central Academy
Industrial Technology Research Institute
Industrial Technology Research Institute
AI Research Institute

Beijing & Anqing Manufacturing Cneter

Mechanical back-to-back test
Simulation test
Motor Load Test

SUPERIOR PERFORMANCE

FLEXIBLE APPLICATION

INTEGRATED CONTROL

TRUSTED RELIABILITY

PRODUCT PARAMETER

Max. PV array power[W]			
Max. open circuit voltage[V]			
Max. input current per string[A]			
Max. short circuit current per string[A]			
MPPT voltage range[V]			
Start operating voltage[V]			